



Flooring
assortment 2024

www.krono-original.com


Krono
Original
High Quality
Made by Kronospan

Welcome to our world!

SURFACE TEXTURES	04
FEATURES GUIDE	06
PRODUCT OVERVIEW	08


Organic VENEER PARQUET	10
Rocko SPC Flooring	20
O.R.C.A. Flooring	52
Organic FLEX	58
Organic LONG	68
Organic CLASSIC	74
Organic CLEVER SILENT	88

mo.re! Laminate Flooring	96
HERRINGBONE 8	100
ALTITUDE	106
ATLANTIC 12	112
ATLANTIC 10	118
ATLANTIC 8	132
Classic Laminate Flooring	148
SUPER NATURAL	152
CASTELLO	174

FORMAT OVERVIEW	180
ACCESSORIES	182
DECOR OVERVIEW	188
PACKAGING INFORMATION	190










www.krono-original.com
www.facebook.com/KronoOriginal

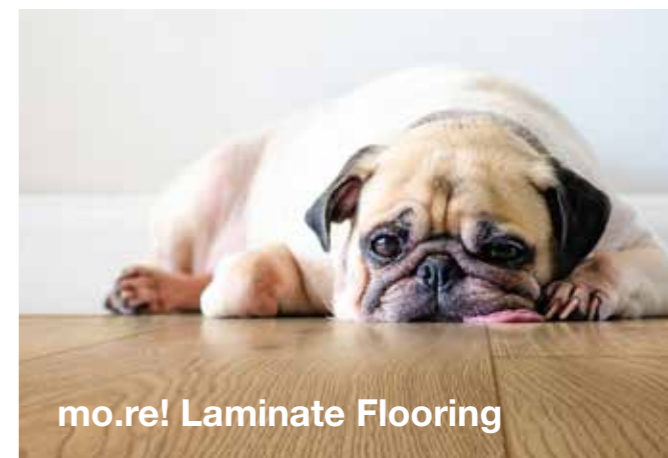

Surface textures

The look and feel of real wood and stone

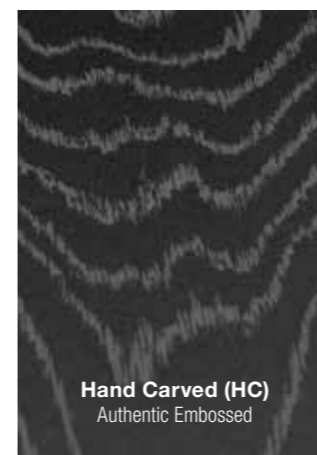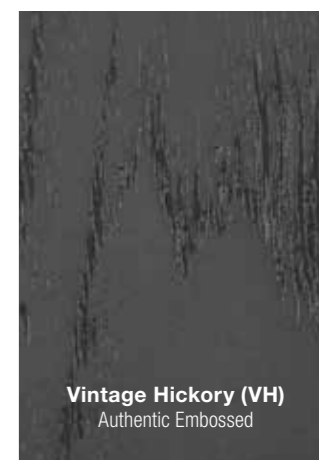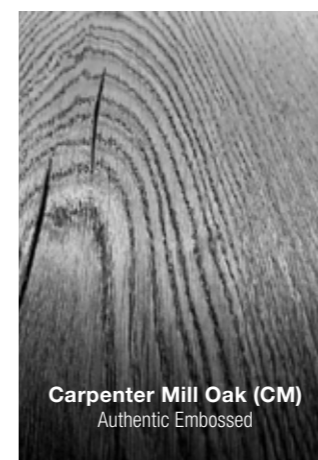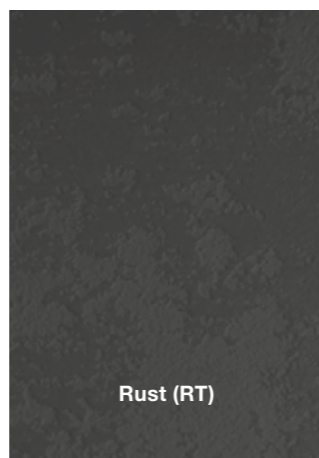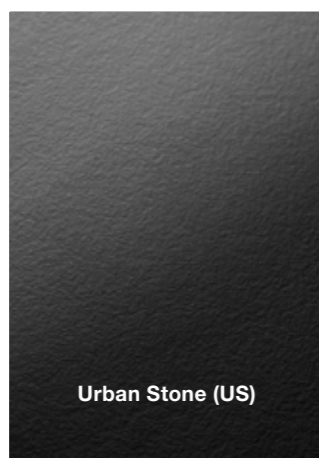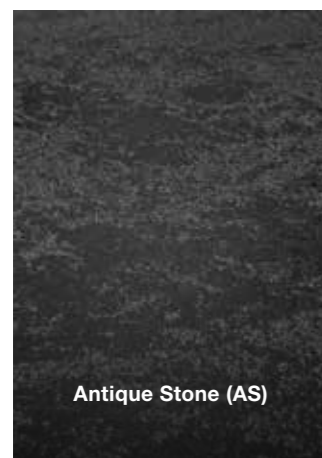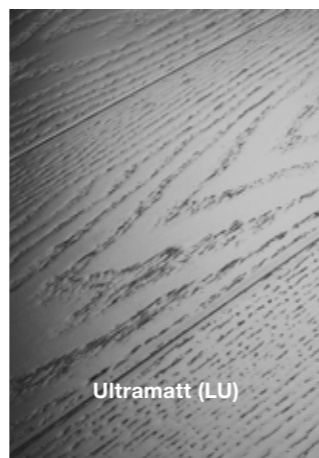


Features guide

Your benefits at a glance



Residential guarantee

All floors are put through a series of rigorous tests in order to comply with international quality standards, which is why we grant an extensive residential warranty with every product.



Real groove

Bevelled edges on all four sides of the plank ensure an authentic floorboard look.



Soft bevel

Inspired by traditional craftsmanship, the true-edge-bevels provide a harmonious room appearance.



Anti bacterial comfort

A.B.C. Anti Bacterial Comfort inhibits the growth of bacteria on your flooring and provides you with the peace of mind that comes from a healthy home environment. Tested germs: Staphylococcus aureus



Authentic embossed

The synchronous pores follow the grain of the decor, meaning they flawlessly mimic the character of natural wood.



Microscratch protect

The robust surface protects your flooring against micro-scratches that can be caused by strong mechanical stresses or the claws of house pets.



Pet-proof

Thanks to the robust surface, which is also undaunted by small mishaps, the flooring is exceptionally well-suited for life with house-pets.



Light-resistant

The flooring is light-resistant: Even on days when the sun is shining for hours, your flooring remains non-fading according to rating 6 of the Blue Wool Scale.



Silent

Due to an integrated pad, the flooring reduces impact sound, echoes and vibrations. An additional underlay is not required, which saves time and money.



Robust

This flooring is amazingly robust due to its super durable surface. Moving furniture or falling objects are not a problem because of its high pressure and impact resistance.



Warm underfoot

Due to its flexible design layer, the flooring has comfortable haptics and is warm underfoot.




Anti-slip class

Safety is something we put great emphasis on. Classification in anti-slip classes has been achieved through specially developed surface structures, which address the requirements for floor coverings in the workplace and commercial areas where a high risk of slipping is present.



Anti-slip class

Classification:
R9 and R10 according to DIN 51130 and DIN EN 16165, A and B according to DIN 51097 and DIN EN 16165



Design diversity

Up to 60 different panels on digitally printed design are possible. This lends your flooring an authentic appearance that is virtually free of repetition.



Soft touch

The flooring has a soft surface and feels very comfortable.



Real wood

This floor is made from real wood. The high-quality brushed oak surface gives every room natural elegance.



Anti-static

The flooring provides complete protection against unpleasant shocks. The Anti-static is built-in and guaranteed for the life of the floor.



R150 Brenton

Product overview

	Collection Name	Durability (Wear Resistance)	Coreboard (Water Protection)	Thickness	Pet- proof	Utilization Class	Residential Guarantee ⁵	Bevel	Joint	Authentic Embossed	SKUs
Veneer Parquet	rganic¹ VENEER PARQUET 1383 x 244 mm 54.45" x 9.61"	Titanium Ultra	² m.re! moisture resistance technology	8.5 mm		32	20 years	Soft Bevel	Tap Loc	-	6
SPC Flooring	ROCKO 1210 x 192 mm 47.64" x 7.56"	Titanium Ultra	SPC	5+1 mm PerfectPad [®] IXPE		34	30 years	V4	1cllic 2go pure	-	8
	1210 x 192 mm 47.64" x 7.56" 1210 x 234 mm 47.64" x 9.21" 1210 x 295 mm 47.64" x 11.61"	Titanium Ultra	SPC	5 mm		34	30 years	V4	1cllic 2go pure	-	24
	rganic¹ FLEX 638 x 322 mm 25.12" x 12.68" 1288 x 189 mm 50.71" x 7.44"	Titanium Ultra	³ O.R.C.A. [®] MOISTURE DEFENSE TECHNOLOGY	7 mm PerfectPad [®] Cork		34	30 years	V4	1cllic 2go pure+	-	11
O.R.C.A. Flooring	rganic¹ LONG 2003 x 195 mm 78.86" x 7.68"	AC5	³ O.R.C.A. [®] MOISTURE DEFENSE TECHNOLOGY	8 mm		33	30 years	V4	1cllic 2go pure+	Yes	6
	rganic¹ CLASSIC 638 x 330 mm 25.12" x 12.99" 1288 x 195 mm 50.71" x 7.68"	AC5	³ O.R.C.A. [®] MOISTURE DEFENSE TECHNOLOGY	8 mm		33	30 years	V4	1cllic 2go pure+	Yes ⁶	15
	rganic¹ CLEVER SILENT 1288 x 195 mm 50.71" x 7.68"	AC5	³ O.R.C.A. [®] MOISTURE DEFENSE TECHNOLOGY	6+1 mm PS Pad		32	20 years	V4	1cllic 2go pure+	Yes	8
	HERRINGBONE 8 630 x 126 mm 24.80" x 4.96"	AC5	² m.re! moisture resistance technology	8 mm		32	20 years	V4	Fold Down	Yes	4
mo.re! Laminate Flooring	ALTITUDE 2003 x 245 mm 78.86" x 9.65"	AC5	⁴ m.re! moisture resistance technology	12 mm		33	30 years	V4	1cllic 2go pure+	Yes	6
	ATLANTIC 12 1288 x 195 mm 50.71" x 7.68"	AC5	⁴ m.re! moisture resistance technology	12 mm		33	30 years	V4	1cllic 2go pure+	Yes	6
	ATLANTIC 10 1288 x 195 mm 50.71" x 7.68"	AC5	⁴ m.re! moisture resistance technology	10 mm		33	30 years	V4	1cllic 2go pure+	Yes	15
	ATLANTIC 8 638 x 330 mm 25.12" x 12.99" 1288 x 195 mm 50.71" x 7.68"	AC4	⁴ m.re! moisture resistance technology	8 mm		32	20 years	V4	1cllic 2go pure+	Yes ⁶	21
	SUPER NATURAL 1288 x 195 mm 50.71" x 7.68"	AC4	HDF	8 mm		32	20 years	V4	1cllic 2go pure+	Yes ⁶	27
Classic Laminate Flooring	CASTELLO 1285 x 192 mm 50.59" x 7.56"	AC4	HDF	8 mm		32	20 years	-	twin clic	-	6

*1 Consists of natural wood and an organic chemical binder

*2 Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance — Assembled joint)

*3 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com, up to 100 h no leakage based on ISO 4760:2022-05

*4 24 h surface water protection as stipulated by NALFA and 48 h splash-water protection according to works standard KRONOSPAN WN-103, www.floor-with-more.com

*5 According to warranty terms

*6 Selected decors

The sustainable alternative to parquet

These wooden floorings are luxurious, cosy and natural. The high-quality brushed oak surface lends homely flair to any room. With the Veneer Parquet series, KRONOSPAN offers authentic wood floors with a real wood veneer as the top layer.



The special thing about it: KRONOSPAN combines the natural properties of the raw material wood with the technical refinements of a multi-layer construction. The top layer consists of a 0.6 millimeter wood veneer – the wood comes exclusively from sustainable forestry. The middle layer consists of a high-density fibreboard (HDF). This makes the flooring particularly stable and durable. Thanks to these properties, Veneer Parquet is a resource-saving and sustainable alternative to conventional parquet flooring.



The innovative feature, mo.re! technology, is the intelligent moisture protection. This means the real wooden surface of the floor is also protected for just in case.




Real wood



Feel the nature



LU Ultramatt surface

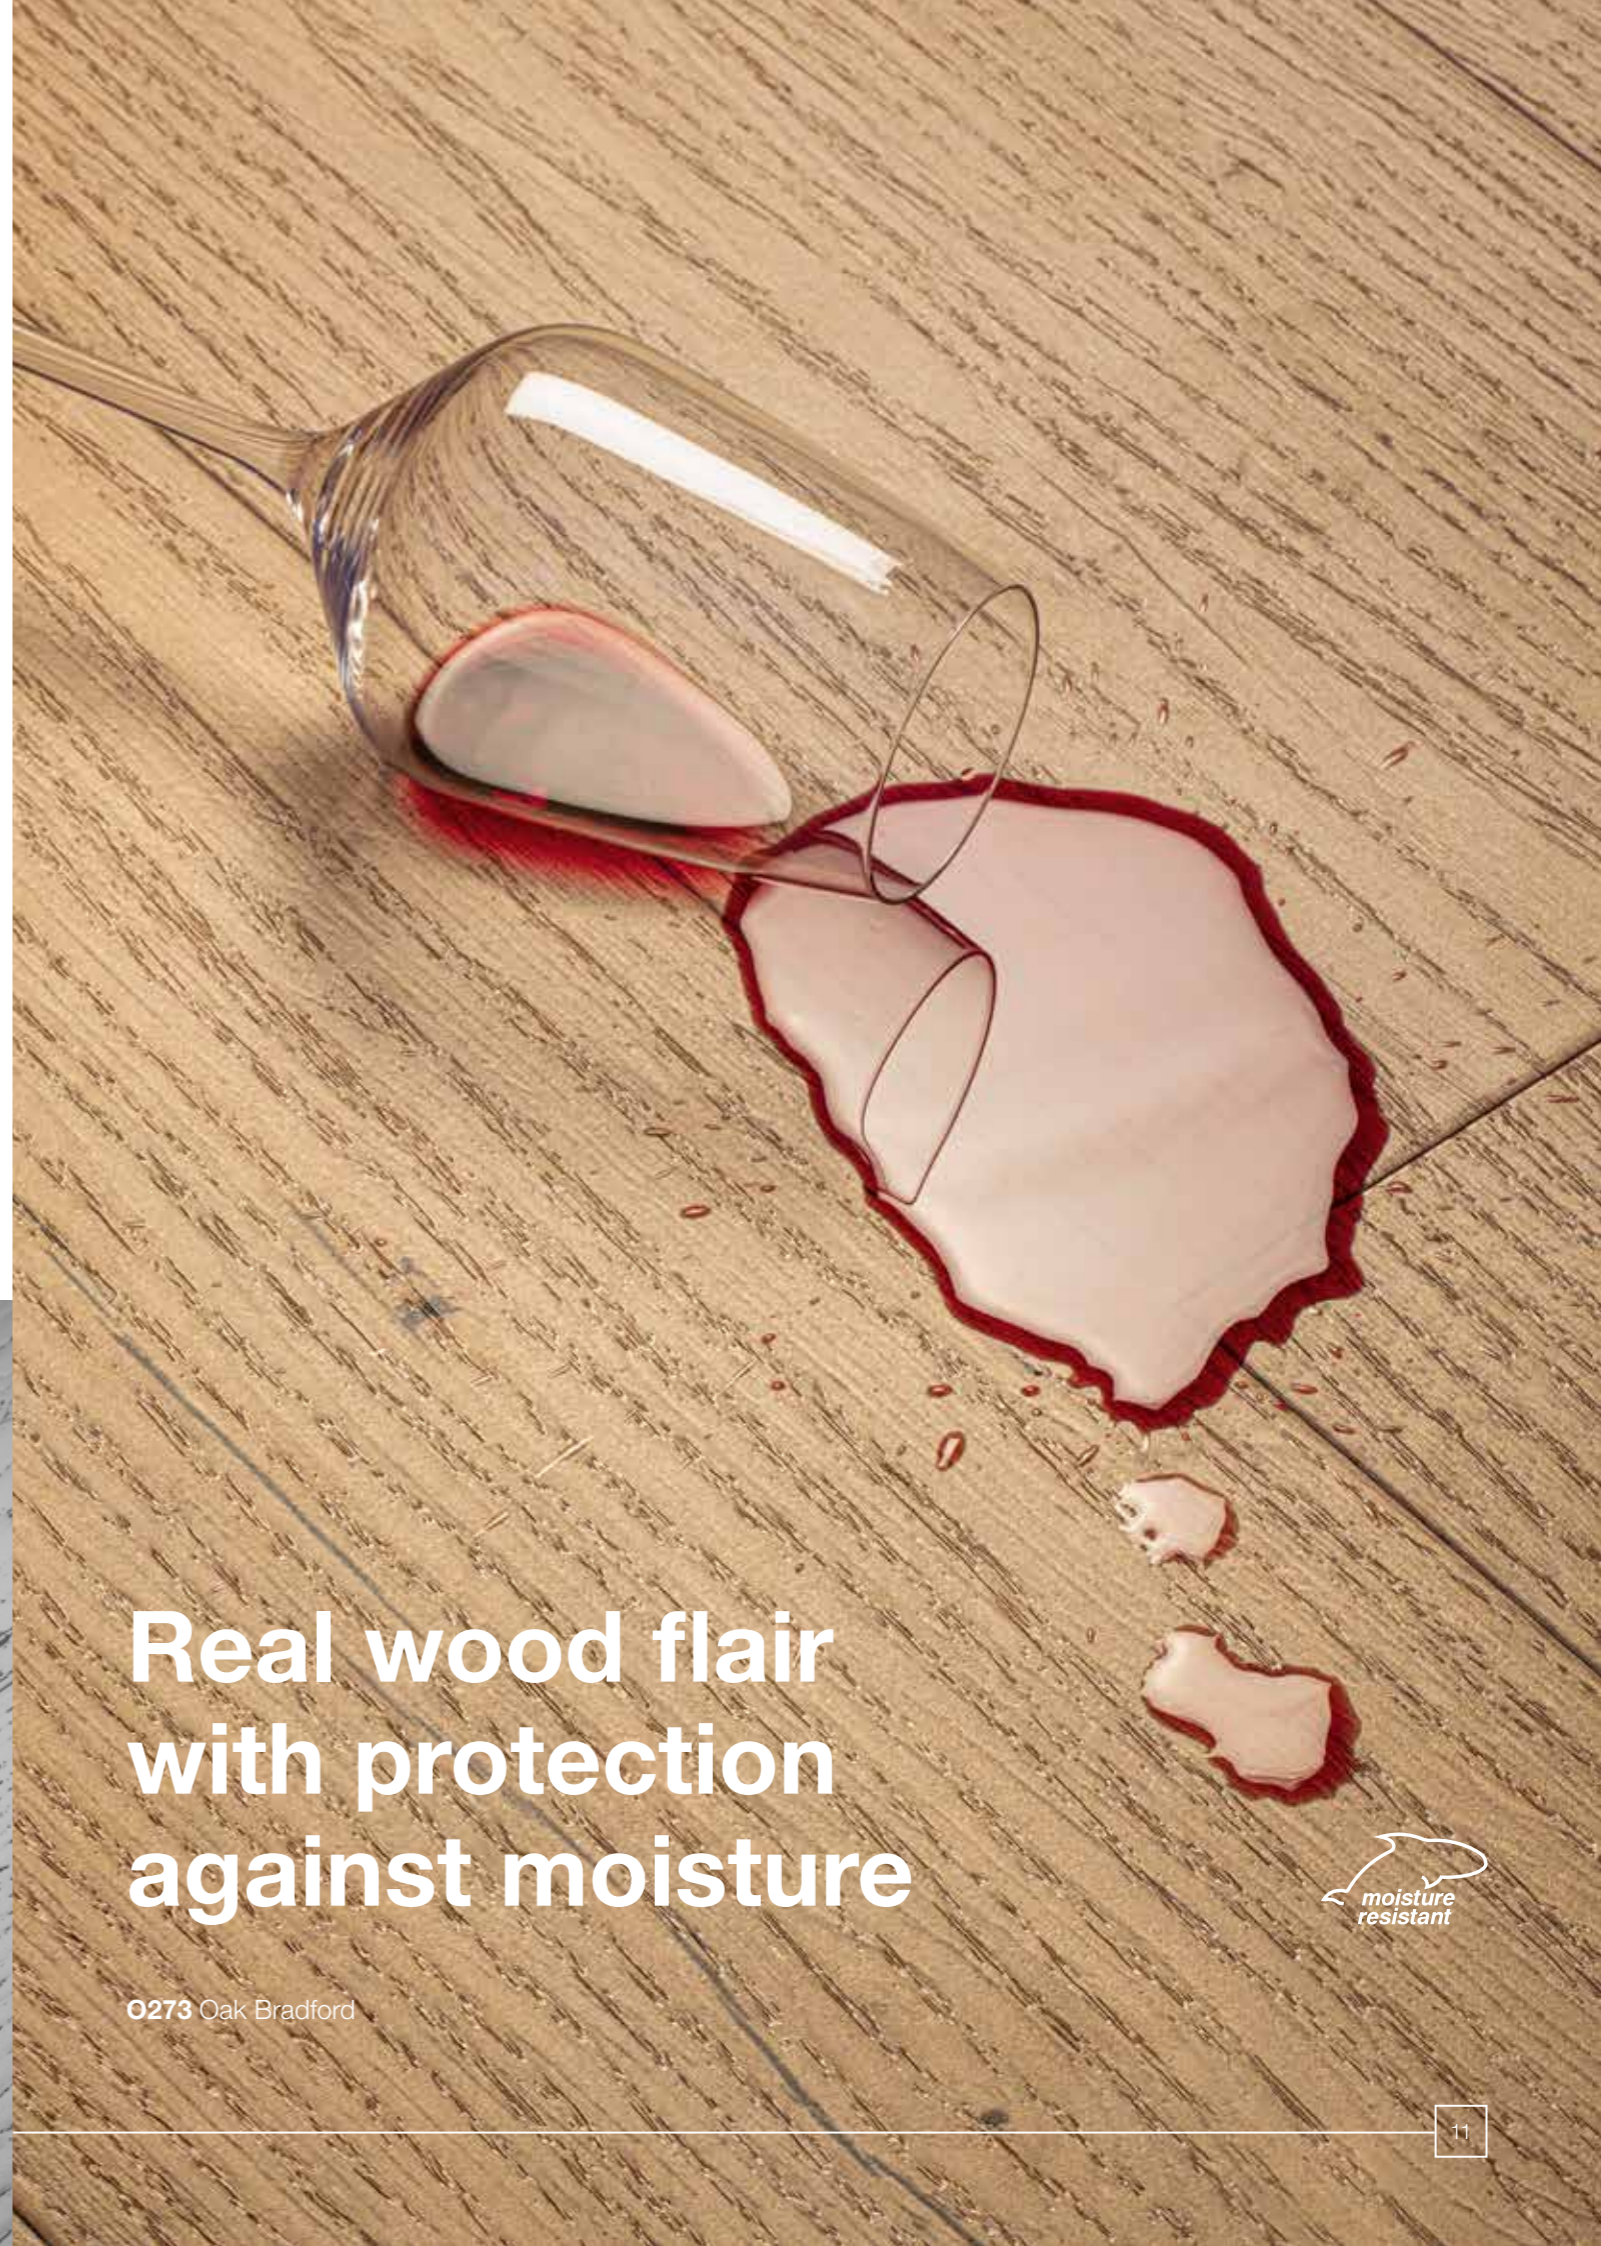

Real wood flair with protection against moisture

0273 Oak Bradford





The sustainable alternative to parquet



Residential guarantee



Utilization class



Soft bevel

Ultramatt surface

Real wood flair

Eco-friendly

Wood from sustainably managed forests

Moisture resistant*

thanks to mo.re! technology

Soft bevel

True-Edge-Bevel for a harmonious room appearance

Easy installation

Ideal for renovations thanks to low profile height

Modern wide planks: 1383 x 244 mm

Amazing designs

* Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance – Assembled joint)



O274 Oak Sunderland

rganic VENEER PARQUET



Oak Cream
O350

Thickness:
8.5 mm

Format:
1383 x 244 mm | 54.45" x 9.61"

Lock:
Tap Loc



EN 14354





1383 mm
(54.45")
244 mm
(9.61")

Oak Sunderland
O274



O273
Oak Bradford, LU



O462
Oak Schönbrunn, LU



O274
Oak Sunderland, LU



Organic VENEER PARQUET



Oak Roast
O352



O350
Oak Cream, LU



O272
Oak Bristol, LU



O352
Oak Roast, LU



ROCKO

Flooring by Kronospan

Waterproof SPC flooring with superior performance

Innovative SPC floors with unique design

Waterproof Rocko Flooring, made of over 70% of mineral core, finished with high-quality UV coating, is an outstanding material for domestic and commercial use, both in new projects and renovations.

Appearance of natural wood & stone

Rocko Flooring designs are digitally printed, reflecting the smallest detail, the rich grain of wood and roughness of stones and concrete.

Ensured stability


Rocko Flooring range is set apart from other types of vinyl flooring by its unique resilient core, which provides an incredibly stable base for each flooring plank and ensures dimensional stability, even with high temperature fluctuations.

Coordinated solution

Available in 3 different formats, allows for any design finishing, going beyond the standard flooring frame. It comes with complementary accessories: waterproof flooring skirting boards, underlay and cleaning liquid for coordinated solution.



Check out the complete collection!

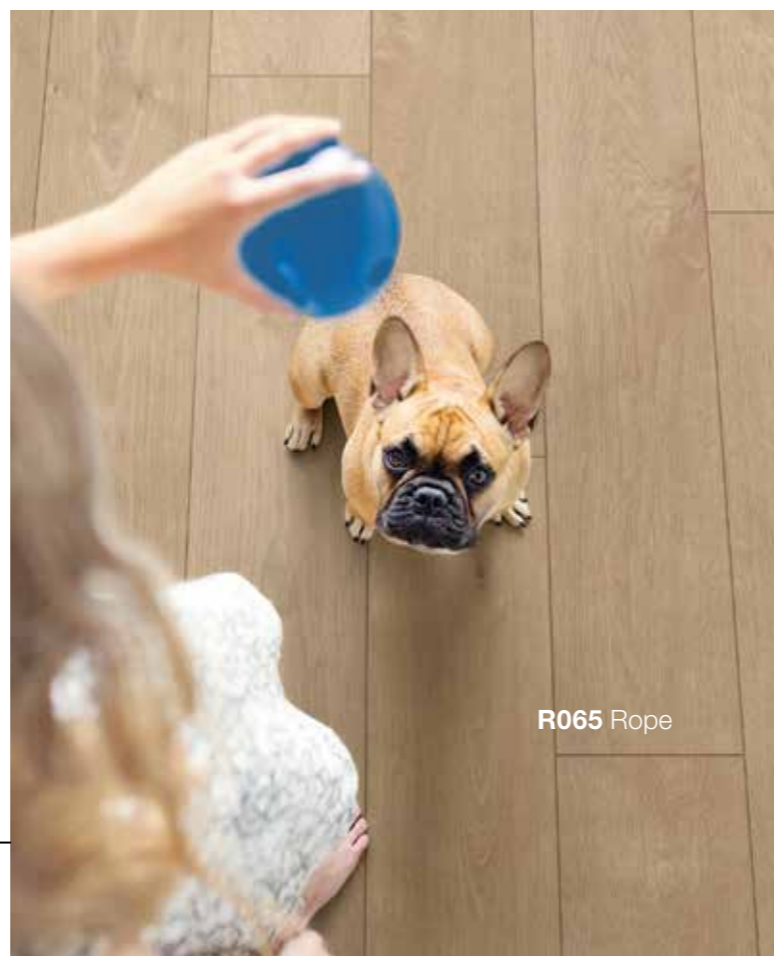

R065 Rope



A solid step up

R123 Nutmeg



ROCKO

Flooring by Kronospan



R129 White Poppy



Waterproof

Rocko Flooring is suitable for indoor use in humid conditions, such as bathroom, laundry room, kitchen or vestibule.

Dimensional stability

Rocko Flooring does not change its dimensions under the influence of temperature and humidity changes. It can be used in sunny and shaded areas as well as in dry and humid ones.

Utility class

Due to its parameters, Rocko Flooring reaches the highest utility class. It can be used in intensively used domestic areas as corridor or kitchen, as well as in commercial spaces with high traffic, such as offices.

Underfloor heating

Rocko Flooring is well suited for underfloor heating, thanks to its mineral content and its very good thermal conductivity parameters.

V-groove

Real v-groove on 4 sides of each plank.



R082 Humidor

ROCKO

with PerfectPad® IXPE 1 mm



Thickness:
5+1 mm

Format:
1210 x 192 mm | 47.64" x 7.56"

Lock:
1 clic 2go pure



EN 16511



Scandipure
R073

ROCKO



with PerfectPad® IXPE 1 mm



1210 mm
(47.64")
192 mm
(7.56")

Crescendo
R081

R073
Scandipure, HS



R081
Crescendo, HS



ROCKO



with PerfectPad® IXPE 1 mm



R078
Airflow, HS



R065
Rope, HS



R077
Barista, HS

Rope
R065

ROCKO




with PerfectPad® IXPE 1 mm



Incando
R070



R076
Bourbon Cask, SO

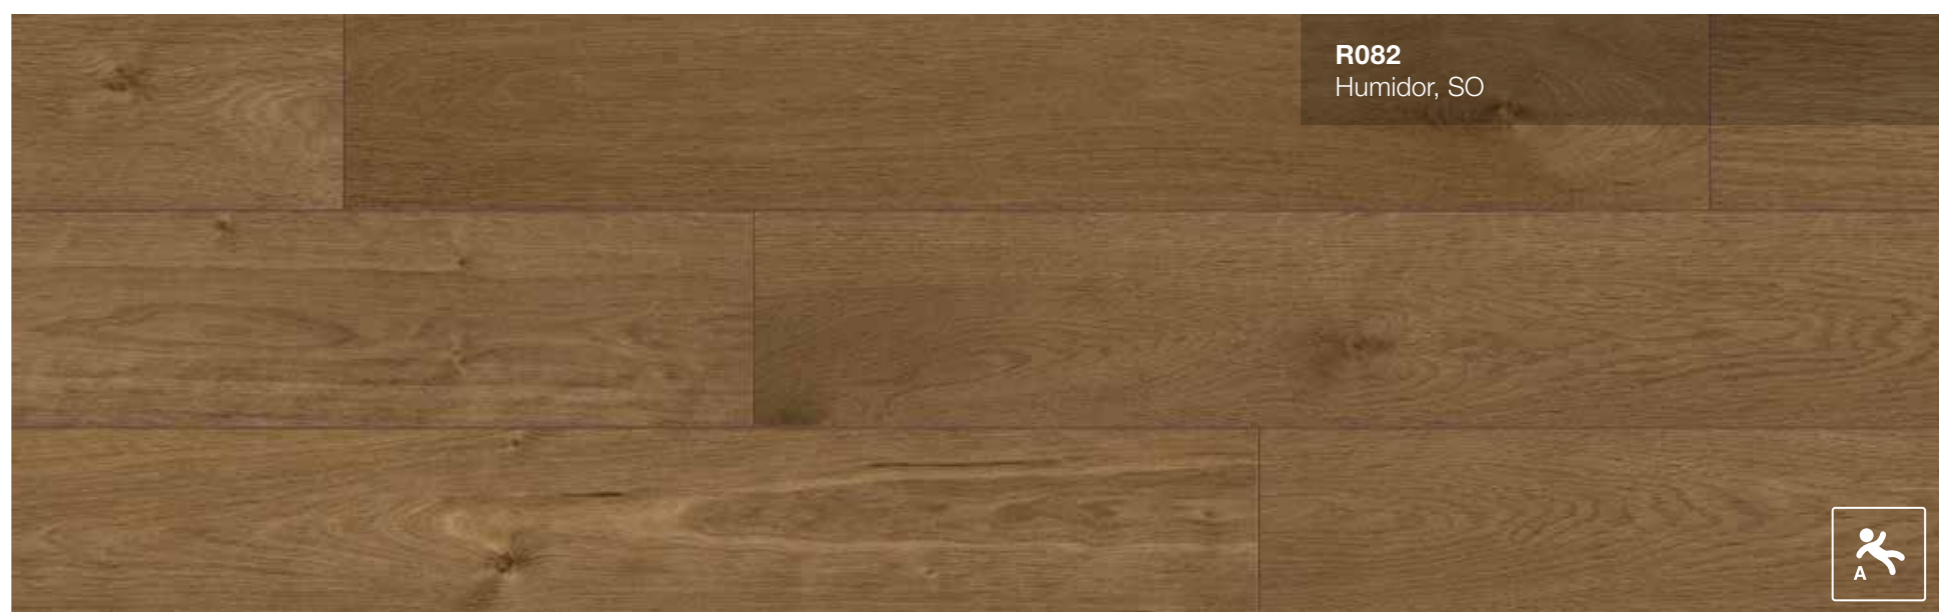

R082
Humidor, SO



R070
Incando, SO




ROCKO



Thickness:
5 mm

Formats:
1210 x 192 mm | 47.64" x 7.56"
1210 x 234 mm | 47.64" x 9.21"
1210 x 295 mm | 47.64" x 11.61"

Lock:
1clic 2go pure



EN 16511



Sculpta
R066

ROCKO



1210 mm
(47.64")
192 mm
(7.56")

Salt Mine
R079



R079
Salt Mine, SO



R078
Airflow, HS



R073
Scandipure, HS

ROCKO



Barista
R077



R077
Barista, HS



R065
Rope, HS



R076
Bourbon Cask, SO



ROCKO



Wild Agar
R171



R173
Marshal Oak, FN



R171
Wild Agar, FN




R081
Crescendo, HS

ROCKO



Sienna
R170

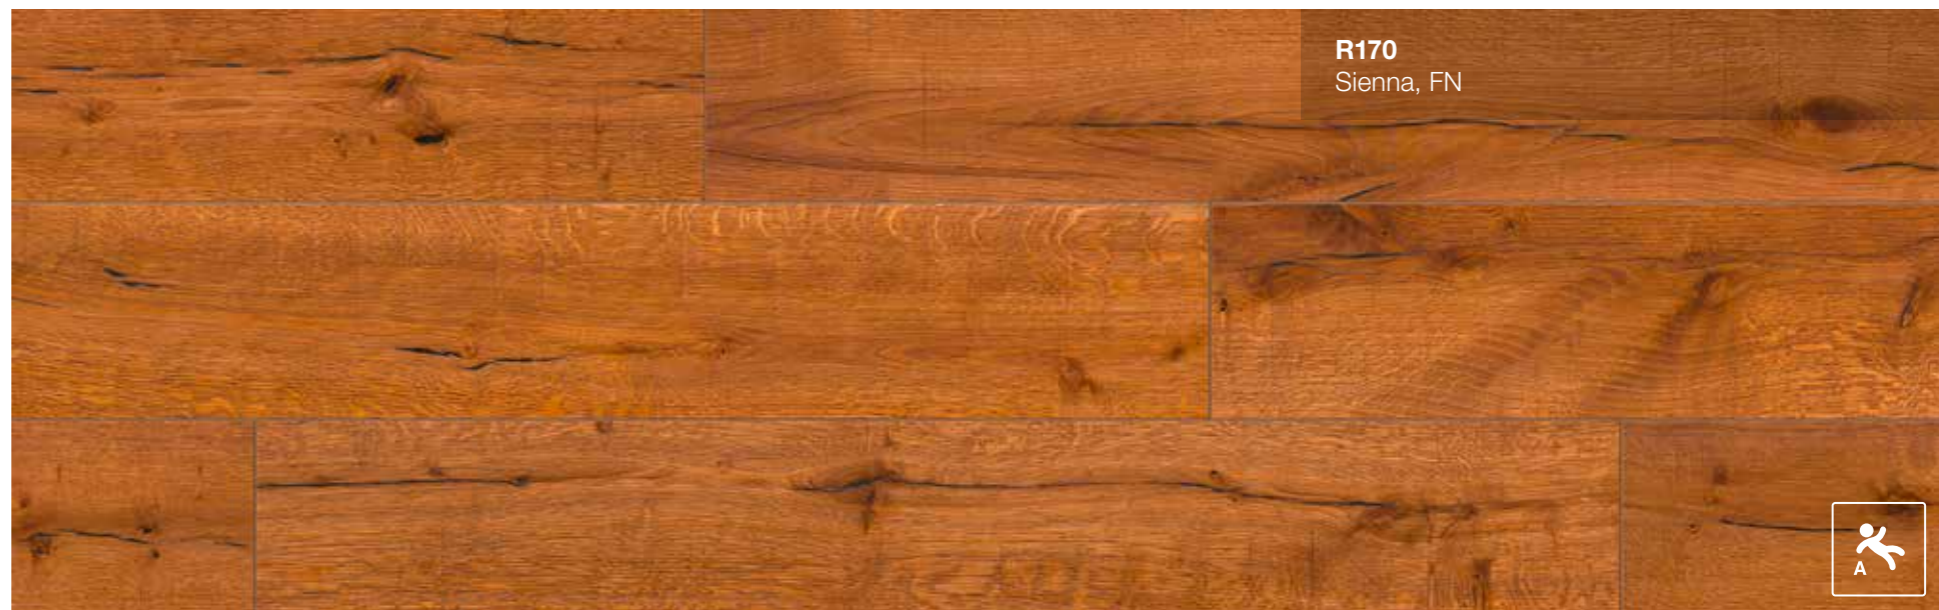

R170
Sienna, FN



R082
Humidor, SO



R070
Incando, SO



ROCKO



1210 mm
(47.64")
234 mm
(9.21")

Clamshell
R148



R148
Clamshell, SO



R066
Sculpta, HS

ROCKO



Brenton
R150

R172
Vigra Oak, FN



R150
Brenton, SO



ROCKO



1210 mm
(47.64")
295 mm
(11.61")

White Poppy
R129



R109
Concrete, PT



R129
White Poppy, SO




R125
Mornel, SO



ROCKO



Ascot
R128

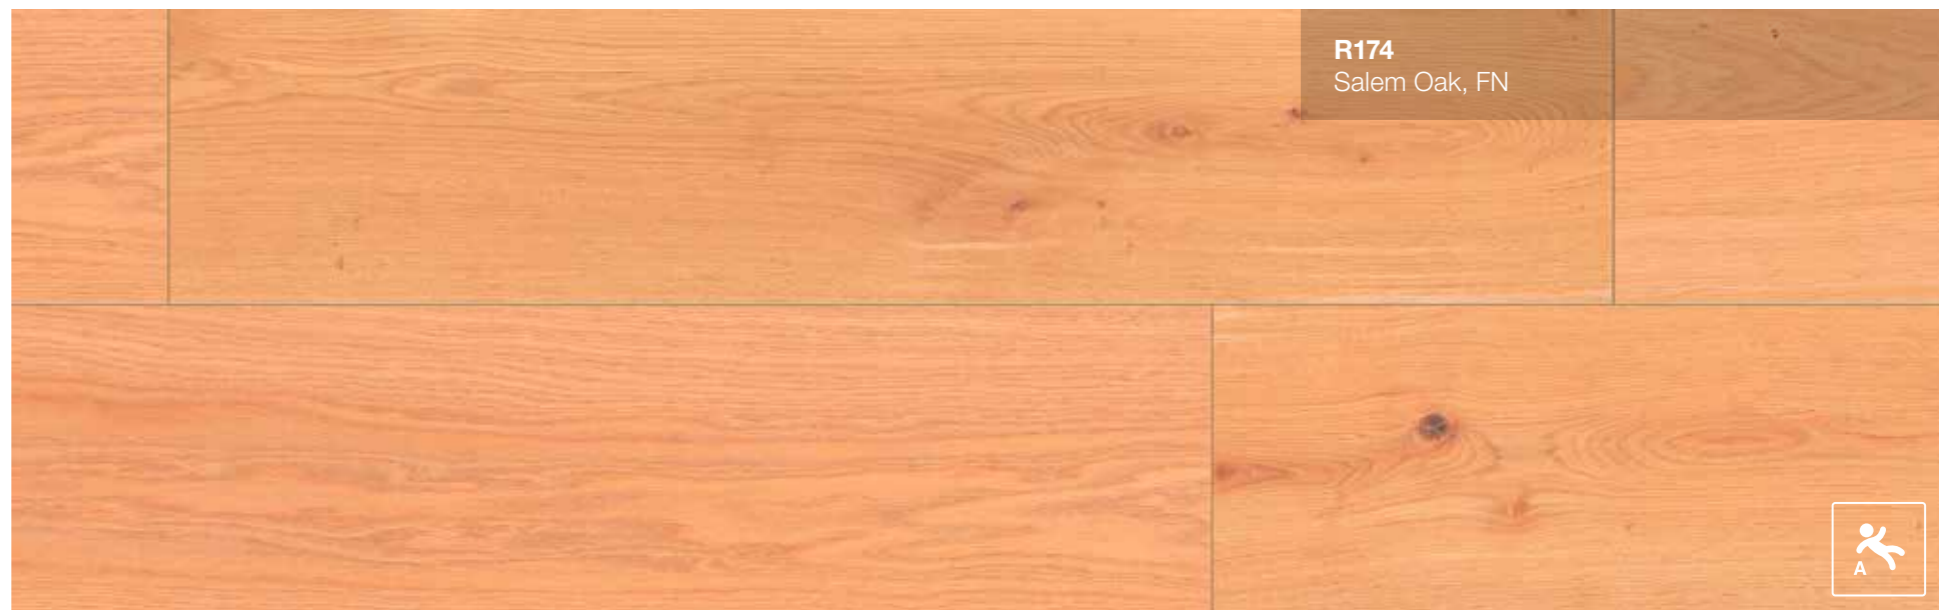

R174
Salem Oak, FN



R128
Ascot, SO



ROCKO



Clove
R124



R123
Nutmeg, SO



R124
Clove, SO




R149
Brown Marten, SO



How O.R.C.A. technology works

Each fiber is encapsulated with a special binder that prevents it from absorbing water.

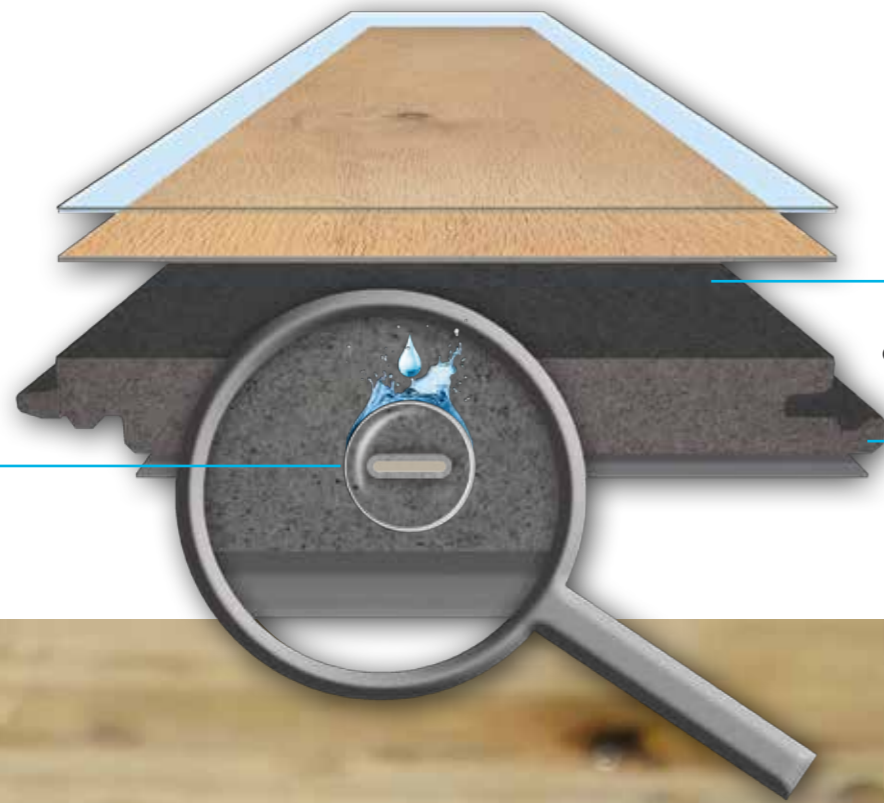

Short fiber length and geometry reduces potential swelling.

Micro expansion on the edges seals the connection between planks.



Wood's self sealing property

Wood expands when exposed to moisture and in doing so seals itself, preventing liquid penetration.

Boat builders take advantage of wood's natural self sealing property.

Wine barrels are still sealed using this time tested method.





MOISTURE DEFENSE TECHNOLOGY

The floor that combines the best

O.R.C.A. = Organic*1 Rigid Coreboard Abrasion-proof

O.R.C.A. is twice as good

It unites the best qualities of biologically based floors and conventional waterproof floor coverings. In O.R.C.A., organic*1 materials are made resistant to liquids by means of a special technology.

O.R.C.A. makes the flooring usable anywhere

The innovative O.R.C.A. board makes it possible to install the flooring even in private bathrooms*2 where, until now, only vinyl or tiles could be used. Furthermore, thanks to their outstanding thermal stability and non-fading properties, O.R.C.A. products also can be used in conservatories and rooms with floor-to-ceiling windows.

O.R.C.A. floors are extremely robust

The robust surface with an AC5 durability rating, protects the flooring against microscratches that can be caused by strong mechanical stresses such as moving furniture, falling objects or the claws of house pets. Thanks to its durable properties, which are also undaunted by small mishaps, O.R.C.A. floors are exceptionally well-suited for life with house pets.

O.R.C.A. is built better because it is more elaborately manufactured

The wood fibers are mechanically processed multiple times in a special production process to obtain especially small fibers. Further on in the manufacturing process a specially developed, organic-chemical binding agent surrounds even the finest fibers and isolates them from moisture.

The floor that's not afraid of water

100 h+ splash-water protection guaranteed*3

Little accidents occur almost daily. Wherever such things are bound to happen, it's worth relying on O.R.C.A. Kitchen, dining room, bathroom – O.R.C.A. is a perfect fit.



Scan the QR code and convince yourself!

*1 Consists of natural wood and an organic chemical binder
*2 Please observe installation instructions
*3 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com, up to 100 h no leakage based on ISO 4760:2022-05



So reliable
you can afford
to take the plunge



O.R.C.A.[®]

MOISTURE DEFENSE TECHNOLOGY

The flooring that is naturally nature-friendly



www.blauer-engel.de/uz176

K500 Pearl River Oak



Sustainable

Sustainability isn't just a buzzword for us, but part of our corporate strategy. It would never cross our minds to use wood that didn't come from sustainably managed forests.

CO₂-negative

O.R.C.A. boards are CO₂-negative because manufacturing O.R.C.A. releases less CO₂ than was stored by the tree.

Organic

Our O.R.C.A. board consists of components based on biological raw materials and organic-chemical binding agents (synthetic resins) and thus is organic.

PVC-free

Our O.R.C.A. products contain no PVC*.



* May contain traces of PVC, e.g. from packaging



Organic FLEX

with PerfectPad® Cork 1 mm



Thickness:
7 mm

Formats:
638 x 322 mm | 25.12" x 12.68"
1288 x 189 mm | 50.71" x 7.44"

Lock:
1clic 2go pure+



EN 16511



Pebble Manor Oak
K503

Organic FLEX 

with PerfectPad® Cork 1 mm



Lunar Range Oak
K506



K500
Pearl River Oak, TN

ORCA®
MOISTURE DEFENSE TECHNOLOGY



K503
Pebble Manor Oak, TN

ORCA®
MOISTURE DEFENSE TECHNOLOGY



K506
Lunar Range Oak, TN

ORCA®
MOISTURE DEFENSE TECHNOLOGY



Organic FLEX  waterproof

with **PerfectPad**® Cork 1 mm



Sand River Oak
K501



K501
Sand River Oak, TN

ORCA®
MOISTURE DEFENSE TECHNOLOGY



K507
Hazel Range Oak, TN

ORCA®
MOISTURE DEFENSE TECHNOLOGY



K504
Tuscan Manor Oak, TN

ORCA®
MOISTURE DEFENSE TECHNOLOGY



Organic FLEX 

with PerfectPad® Cork 1 mm



Flax River Oak
K502



K502
Flax River Oak, TN

ORCA®
MOISTURE DEFENSE TECHNOLOGY



K505



K505
Tobacco Manor Oak, TN

ORCA®
MOISTURE DEFENSE TECHNOLOGY



Organic FLEX 

with PerfectPad® Cork 1 mm



Brooklyn Vibe
K509



K508
Brooklyn Mist, US

ORCA®
MOISTURE DEFENSE TECHNOLOGY



K509
Brooklyn Vibe, US

ORCA®
MOISTURE DEFENSE TECHNOLOGY



K510
Brooklyn Dark, US

ORCA®
MOISTURE DEFENSE TECHNOLOGY



Organic LONG



Thickness:
8 mm

Format:
2003 x 195 mm | 78.86" x 7.68"

Lock:
1 clic 2go pure+



EN 13329



Silverdale Oak
K451



2003 mm
(78.86")
195 mm
(7.68")

Silverdale Oak
K451



K451
Silverdale Oak, HO



K284
Summer Breeze Oak, RO



K450
Firebrand Oak, HO





Steelworks Oak
K287



K327
Hillside Oak, RO



K287
Steelworks Oak, HO



8156
Red River Hickory, VH



Organic CLASSIC



Tornado Oak
K395

Thickness:
8 mm

Formats:
638 x 330 mm | 25.12" x 12.99"
1288 x 195 mm | 50.71" x 7.68"

Lock:
1clic 2go pure+



EN 13329





1288 mm
(50.71")
195 mm
(7.68")

Misty Plains Oak
K231



K668
Misty Ethereal Oak, ET



K231
Misty Plains Oak, TO



K669
Rope Ethereal Oak, ET



Organic CLASSIC 



Solar Oak
K405



K406
Eurur Oak, NL

ORONA[®]
MOISTURE DEFENSE TECHNOLOGY



K405
Solar Oak, NL

ORONA[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLASSIC 



Golden Vista Oak
K230



K230
Golden Vista Oak, TO

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY



5947
Historic Oak, HO

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY



K224
Wild West Oak, NL

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY





Tornado Oak
K395



K665
Copper Ethereal Oak, ET



K395
Tornado Oak, NL



K479
Espresso Carpenter Oak, CM





Silverado Slate
K387



K385
Ice Flow, RT



K387
Silverado Slate, OS



Organic CLASSIC waterproof



Crosstown Traffic
K035



K035
Crosstown Traffic, AS

ORCA[®]
MOISTURE DEFENSE TECHNOLOGY



K389
Nightfall Slate, OS

ORCA[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLEVER SILENT

with PS Pad 1 mm



Thickness:
6+1 mm

Format:
1288 x 195 mm | 50.71" x 7.68"

Lock:
1 clic 2go pure+



EN 13329



Rutherford Oak
K488

Organic CLEVER SILENT 

with PS Pad 1 mm



1288 mm
(50.71")
195 mm
(7.68")

Colorado Oak
5543



5543
Colorado Oak, HC

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY



K063
Organic Oak, TO

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY



K452
Ashland Oak, HO

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLEVER SILENT 

with PS Pad 1 mm



Blackwater Oak
K413



K413
Blackwater Oak, OE

ORONA[®]
MOISTURE DEFENSE TECHNOLOGY



K488
Rutherford Oak, CM

ORONA[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLEVER SILENT 

with PS Pad 1 mm



Heathland Oak
K598



K598
Heathland Oak, HO

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY



K327
Hillside Oak, RO

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY



K489
Bourbon Hills Oak, HO

OR.CA.[®]
MOISTURE DEFENSE TECHNOLOGY





Laminate Flooring Take more. Endure more. Withstand more.

mo.re! from KRONOSPAN is a moisture-resistant laminate flooring product that makes laminate even more practical for everyday life.



mo.re! makes laminate flooring even more moisture-resistant. And that's a good thing. After all, small everyday mishaps can happen to anyone.

How mo.re! technology works

mo.re! is based on a specially developed substrate formula.

Its new binding agent makes the flooring more durable and decreases swelling – improving resistance to moisture penetration.



Scan the QR code and check out the mo.re! features!

* 24 h surface water protection as stipulated by NALFA and 48 h splash-water protection according to works standard KRONOSPAN WN-103, www.floor-with-more.com



Your floor can do mo.re!

K476 Inca Carpenter Oak





mo.re! can stand up to what life brings



www.blauer-engel.de/uz176

K326 Sundance Oak



It is **much more moisture-resistant** than traditional laminate flooring

It is **A.B.C. surface*** inhibits bacteria growth on floors to protect your family

It is **light-resistant**: Even on days when the sun is shining for hours, your flooring remains nonfading according to rating 6 of the Blue Wool Scale.

It is **perfect for life with house pets** – the robust and hard-wearing surface masters the everyday challenges of households with pets

It is great for **installation in private bathrooms****

It is available in **utilization classes 32 and 33** according to DIN EN 13329

* Tested germs: Staphylococcus aureus ** Please refer to the installation instructions



mo.re! for the environment

mo.re! offers more, even for the environment

It is made using only wood from sustainably managed forests. And KRONOSPAN does not use any PVC in flooring with the mo.re! technology. This demonstrates our commitment to environmental stewardship. mo.re! substrate is CO₂-negative: Processing a tree to make this product emits less CO₂ than the tree has stored in its life.



* May contain traces of PVC, e.g. from packaging

HERRINGBONE 8



Thickness:
8 mm

Format:
630 x 126 mm | 24.80" x 4.96"

Lock:
Fold Down



EN 13329



Rutherford Oak
K488

HERRINGBONE 8



630 mm
(24.80")
126 mm
(4.96")

Sundance Oak
K326



K326
Sundance Oak, RO



5947
Historic Oak, HO



HERRINGBONE 8



Laguna Oak
K411



K488
Rutherford Oak, CM



K411
Laguna Oak, OE



ALTITUDE



Thickness:
12 mm

Format:
2003 x 245 mm | 78.86" x 9.65"

Lock:
1 clic 2go pure+



EN 13329



Sundance Oak
K326

ALTITUDE



2003 mm
(78.86")
245 mm
(9.65")

Blonde Montreux Oak
K659



K659
Blonde Montreux Oak, MX



K658
Canvas Montreux Oak, MX



K657
Honey Montreux Oak, MX





ALTITUDE



Sundance Oak
K326



K326
Sundance Oak, RO



K662
Sepia Tegernsee Oak, TG



K664
Hare Tegernsee Oak, TG



ATLANTIC 12



Iceberg Oak
K336

Thickness:
12 mm

Format:
1288 x 195 mm | 50.71" x 7.68"

Lock:
1cllic 2go pure+



EN 13329



ATLANTIC 12



1288 mm
(50.71")

195 mm
(7.68")

Iceberg Oak
K336



K336
Iceberg Oak, HC



5542
Boulder Oak, HC



K285
Haybridge Oak, HO



ATLANTIC 12 

A SMILE
IS THE
PRETTIEST
THING
YOU CAN
WEAR



Inca Carpenter Oak
K476



K450
Firebrand Oak, HO



K476
Inca Carpenter Oak, CM



K287
Steelworks Oak, HO



ATLANTIC 10



Thickness:
10 mm

Format:
1288 x 195 mm | 50.71" x 7.68"

Lock:
1 clic 2go pure+



EN 13329



Espresso Carpenter Oak
K479

ATLANTIC 10



1288 mm
(50.71")
195 mm
(7.68")

Virgin Scandi Larch
K475



K475
Virgin Scandi Larch, VS



K668
Mist Ethereal Oak, ET



K669
Rope Ethereal Oak, ET



ATLANTIC 10



Mushroom Carpenter Oak
K478



K667
Alpaca Ethereal Oak, ET



K478
Mushroom Carpenter Oak, CM



ATLANTIC 10



K665
Copper Ethereal Oak, ET



K476
Inca Carpenter Oak, CM



5537
Tawny Chestnut, RC



Inca Carpenter Oak
K476

ATLANTIC 10



Doublon Oak
K412

5947
Historic Oak, HO



K412
Doublon Oak, OE



ATLANTIC 10



Laguna Oak
K411



K413
Blackwater Oak, OE



K411
Laguna Oak, OE



ATLANTIC 10



Appalachian Hickory
8155



8155
Appalachian Hickory, VH



8156
Red River Hickory, VH



K479
Espresso Carpenter Oak, CM



ATLANTIC 8



Thickness:
8 mm

Formats:
638 x 330 mm | 25.12" x 12.99"
1288 x 195 mm | 50.71" x 7.68"

Lock:
1clic 2go pure+



 <p>23 EN 13329</p>	 <p>32</p>	 <p>AC4 ★★★★★</p>	 <p>20 YEARS</p>
---	---	--	---

 <p>4</p>			
---	---	---	---

Hillside Oak
K327

ATLANTIC 8



1288 mm
(50.71")
195 mm
(7.68")

Silverdale Oak
K451



K640
Cotton Greenvale Oak, MW



K451
Silverdale Oak, HO



K392
Atomic Oak, RO



ATLANTIC 8



Biscotti Oak
K453



K463
Weathered Volcano Oak, NL



K469
Tortilla Cashmere Oak, NL



K453
Biscotti Oak, HO



ATLANTIC 8



Sundance Oak
K326



K653
Ecrú Cantal Oak, MW



K326
Sundance Oak, RO



K327
Hillside Oak, RO



ATLANTIC 8



Antique Cashmere Oak
K471



K471
Antique Cashmere Oak, GT



K627
Caramel Pistachio Oak, MW



K649
Sienna Montreux Oak, MW



ATLANTIC 8



Antique Volcano Oak
K461



K634
Mushroom Apollo Oak, MW



K461
Antique Volcano Oak, NL



K650
Grizzly Montreux Oak, MW



ATLANTIC 8



638 mm
(25.12")
330 mm
(12.99")

Crosstown Traffic
K035



K385
Ice Flow, RT



4375
Pearl Grey Oxide, AS



K035
Crosstown Traffic, AS



ATLANTIC 8



Pewter Slate
K388



K387
Silverado Slate, OS



K388
Pewter Slate, OS



K389
Nightfall Slate, OS



Classic

LAMINATE
FLOORING

Give your surroundings a unique flair



Laminate enjoys a fantastic reputation as an absolute all-rounder. There is hardly an area or room that is not suitable for its installation. Whether children's rooms or living rooms, offices or shops, with or without pets – laminate flooring is a beautiful and uncomplicated partner thanks to its robustness and durability.

The list of advantages of laminate flooring is long – easy to clean and therefore hygienic, anti bacterial thanks to surface structures that bacteria cannot adhere to, light-resistant and hard-wearing. Last but not least, there is the range of decors and surfaces, that leave nothing to be desired.

Authenticity you can see and feel

Very close to the original – these are laminate decors, whose appearance is made up of two factors – image and surface.

Color and light form the symbiosis for a perfect reproduction of wood, stone and tiles. And the perfect optical representation is complemented by the tactile reproduction. Vision and touch, the interaction of the senses.



5966 Khaki Oak



Fantastic look

K418 Longbow Oak

Classic

LAMINATE FLOORING

Favourite for everyday living



www.blauer-engel.de/uz176

5966 Khaki Oak



Easy to install

The sophisticated KronoOriginal® click systems make installation child's play. The prerequisite is good preparation – having all panel materials, accessories and tools at the ready, as well as planning with the help of the checklist and the appropriate instructions.

The floor for every requirement

An important factor when choosing a laminate floor is the utility class. The more a room is frequented and therefore the floor is challenged, the higher the usage class has to be. The utility class describes the possible stress on the entire panel and thus indicates whether the flooring is recommended mainly for private or also for commercial use. This consideration is important regarding to the warranty conditions.

Utilization class 32 (EN 13329)
Suitable for heavy domestic and medium commercial use



Healthy living

A.B.C. – Anti Bacterial Comfort ensures that bacteria*¹, dust mites and microbes have no chance of settling on them. This makes cleaning the laminate flooring easier and quicker and therefore particularly hygienic.

Healthy living also means that additives such as PVC*², chloride or wood preservatives are not used and can therefore neither trigger nor intensify allergies.



Sustainable

Laminate flooring consists of around 90 percent natural wood, which comes exclusively from sustainably managed forestry. This is guaranteed by the PEFC certificate.

Generally, all production processes are low-emission and therefore sustainable.

¹ Tested germs: Staphylococcus aureus
² May contain traces of PVC, e.g. from packaging



SUPER NATURAL



Thickness:
8 mm

Format:
1288 x 195 mm | 50.71" x 7.68"

Lock:
1clic 2go pure+



EN 13329



Credenza Oak
K338

SUPER NATURAL



Colorado Oak
5543



8630
Aspen Oak, LP



5543
Colorado Oak, HC



SUPER NATURAL



Boulder Oak
5542



K652
Cashew Montreux Oak, MW



K418
Longbow Oak, GT



5542
Boulder Oak, HC



SUPER NATURAL



Natural Sterling Oak
K485



K485
Natural Sterling Oak, NL



8575
Blonde Oak, LP



5966
Khaki Oak, NL



SUPER NATURAL



5946
Rockford Oak, NL



K407
Ashenwood Oak, GT

SUPER NATURAL



K641
Linen Sheridan Oak, MW



K419
Armoury Oak, GT



5985
Sherwood Oak, GT

Armoury Oak
K419

SUPER NATURAL



Credenza Oak
K338



K638
Wheat Cornforth Oak, MW



K625
Wheat Pistachio Oak, MW



K338
Credenza Oak, NL



SUPER NATURAL



Clearwater Oak
K057



K057
Clearwater Oak, GT



8631
Castle Oak, LP



SUPER NATURAL



K629
Gold Fiordaliso Oak, MW



K633
Gold Apollo Oak, MW



8573
Harlech Oak, LP



Harlech Oak
8573

SUPER NATURAL



Gondola Oak
K468



K468
Gondola Oak, GT



K647
Clay Sola Oak, MW



K635
Fawn Apollo Oak, MW

SUPER NATURAL



Twilight Sterling Oak
K482



K482
Twilight Sterling Oak, NL



K642
Flint Monticello Oak, MW



5541
Bedrock Oak, HC



CASTELLO



Thickness:
8 mm

Format:
1285 x 192 mm | 50.59" x 7.56"

Lock:
Twin clic



EN 13329



Natural Cashmere Oak
K470

CASTELLO



1285 mm
(50.59")
192 mm
(7.56")

Gold Volcano Oak
K462



K470
Natural Cashmere Oak, GT



K656
Cabinwood Oak, MW



K462
Gold Volcano Oak, NL



CASTELLO



Tornado Oak
K395



K396
Skydive Oak, NL



K039
Silverside Driftwood, GT



K395
Tornado Oak, NL



Format overview



Plank Size	630 x 126 mm 24.80" x 4.96"	638 x 322 mm 25.12" x 12.68"	638 x 330 mm 25.12" x 12.99"	1210 x 192 mm 47.64" x 7.56"	1210 x 234 mm 47.64" x 9.21"	1210 x 295 mm 47.64" x 11.61"	1285 x 192 mm 50.59" x 7.56"	1288 x 189 mm 50.71" x 7.44"	1288 x 195 mm 50.71" x 7.68"	1383 x 244 mm 54.45" x 9.61"	2003 x 195 mm 78.86" x 7.68"	2003 x 245 mm 78.86" x 9.65"
Collection Name	Herringbone 8	Organic Flex Tile	Organic Classic Tile Atlantic 8 Tile	Rocko	Rocko	Rocko	Castello	Organic Flex	Organic Classic Organic Clever Silent Atlantic 12 10 8 Super Natural	Organic Veneer Parquet	Organic Long	Altitude

Accessories that match your floor perfectly

Selected range of products

Every floor needs proper accessories. We can supply you with the ideal equipment for all types of flooring. One contact, one supplier – which makes everything so much simpler for you.

Underlays

Depending on the situation in the room, attention must be paid to the correct underlay material when installing the flooring. For this we offer multiple solutions.

Skirting boards

Choose from a range of skirtings in various decors that match all KronoOriginal[®] floors. Our advanced fixing system makes it quick and simple to achieve a perfect installation.

Additional accessories

If you still look for the proper skirting board, corner pieces, aluminium adhesive tape for sealing or you are done and wish to mop the floor, take a look at the following pages and discover the wide range of accessories.

All under one roof

Our guidance system shows the matching products for different types of floor.

- Veneer Parquet**

Organic VENEER PARQUET:
Height: 8.5 mm
- SPC Flooring**

SPC flooring:
Height: 5 mm and 5+1 mm, including silent pad, floating installation
- O.R.C.A. Flooring**








O.R.C.A. flooring:
Height: 6+1, 7 and 8 mm, organic rigid coreboard, floating installation
- Laminate Flooring**

Laminate flooring:
Height: 8, 10 and 12 mm








Underlays

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Underlay PUR 1.0		98535 [EX PUR1.0_ORCA] 98535 [EX PUR1.0_SPC]	Material: PET film + polyurethane heavy-duty layer + non-woven material	1 x 10 m = 10 m ²	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Underlay PUR 2.0		98571 [EX KO98571N]	Material: Polyurethan and mineral fillers	1 x 7.5 m = 7.5 m ²	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Underlay WOOD 5.0		90171 [EX 90171.]	Material: Wood fibres	0.79 x 0.59 m x 15 = 7 m ²	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Underlay XPS 5.0		98536 [EX XPS5.0]	Material: Extruded polystyrene	1.18 x 4.7 m = 5.5 m ²	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Underlay XPS 2.2 ALU		98515 [EX XPS2.2ALU]	Material: HFPS-foam & moisture protection foil	1.2 x 12.5 m = 15 m ²	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
PE foil		98111 [EX FOLIE2.0]	Material: Polyethylene	2 x 7.5 m = 15 m ²	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Aluminium tape		98191 [EX ALUBAND]	Thickness: 0.048 mm Width: 50 mm	1 roll (50 m)	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring








Skirting boards

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
K58C		91061 [EX xxxxSLH]	2600 x 58 x 18 mm	10 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
K58C skirting board moisture resistant		97345 [EX SK58C-xxxx]	2400 x 58 x 18 mm	10 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
K58C skirting board for floors with O.R.C.A. (Moisture Defense Technology)		95316 [EX xxxxSLH-ORCA]	2600 x 58 x 18 mm	10 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Square cut skirting board		95951 [EX 9002DS19_100]	2600 x 100 x 17 mm	5 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Square cut skirting board		95481 [EX 9002DS19_70]	2600 x 70 x 17 mm	10 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Square cut skirting board		95491 [EX 9002DS19_58]	2600 x 58 x 17 mm	10 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Shaped skirting board		95981 [EX 9002DS17_100]	2600 x 100 x 17 mm	5 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring






Skirting boards

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Shaped skirting board		95991 [EX 9002DS17_70]	2600 x 70 x 17 mm	10 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Shaped skirting board		95471 [EX 9002DS17_58]	2600 x 58 x 17 mm	10 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Rounded skirting board		96001 [EX 9002DS15_100]	2600 x 100 x 15 mm	5 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Rounded skirting board		96021 [EX 9002DS16_90]	2600 x 90 x 16 mm	5 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Rounded skirting board		96011 [EX 9002DS15_70]	2600 x 70 x 17 mm	10 pcs.	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Accessories for K58C skirting board		98011 98001 98021	External corners Internal corners End caps	90° in packs of 2 90° in packs of 2 in packs of 4, 2 left and 2 right	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring
Mounting clips		91501 [EX 50510]	-	Box of 30 pieces, complete with screws and rawl plugs	Veneer Parquet, SPC Flooring, O.R.C.A. Flooring, Laminate Flooring














Profile systems

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Design click transition profile, 2-part		95112 95113	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Design click ramp profile, 2-part		95122 95123	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Design click end profile, 2-part		95132 95133	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Transition click profile		98391 98381	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Ramp click profile		98411 98401	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
End click profile		98371 98361	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
3in1 profiles		95315 [EX 95315-A002] anodised stainless steel	1000 mm	10 pcs.	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring

Additional accessories

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Tap-block		90274 [EX SCHLAGKLOTZ]	168/90 x 70 x 20 mm	20 pcs.	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Clickguard™ joint sealant		90431 [EX 94270]	-	125 ml ÷ ca. 10 m²	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Laminate cleaner		90411 [EX 92011]	-	1000 ml	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Design floor cleaner		97554 [EX DESIGNBODEN_ REINIGER]	-	750 ml	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Cleaner for floors with O.R.C.A. (Moisture Defense Technology)		90411 [EX REINIGER_ORCA]	-	750 ml	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring

Decor overview

Flooring Type	Collection Name	Decors
Veneer Parquet	Organic VENEER PARQUET	 O273 O462 O274 O350 O272 O352
SPC Flooring	ROCKO	 R079 R129 R078 R109 R148 R172 R174 R077 R065 R125 R173 R073 R066 R128 R123 R171 R081 R149 R124 R082 R170 R070 R150 R076
O.R.C.A. Flooring	Organic FLEX	 K500 K503 K506 K501 K507 K504 K502 K505 K508 K509 K510
	Organic LONG	 K451 K284 K450 K327 K287 8156
	Organic CLASSIC	 K668 K231 K669 K406 K405 K230 5947 K224 K665 K395 K479 K385 K387 K035 K389
	Organic CLEVER SILENT	 5543 K063 K452 K413 K488 K598 K327 K489
mo.rel. Laminate Flooring	HERRINGBONE 8	 K326 5947 K488 K411
	ALTITUDE	 K659 K658 K657 K326 K662 K664
	ATLANTIC 12	 K336 5542 K285 K450 K476 K287
	ATLANTIC 10	 K475 K668 K669 K667 K478 K665 K476 5537 5947 K412 K413 K411 8155 8156 K479
	ATLANTIC 8	 K640 K451 K392 K463 K469 K453 K653 K326 K327 K471 K627 K649 K634 K461 K650 K385 4375 K035 K387 K388 K389
Classic Laminate Flooring	SUPER NATURAL	 8630 5543 K652 K418 5542 K485 8575 5966 5946 K407 K641 K419 5985 K638 K625 K338 K057 8631 K629 K633 8573 K468 K647 K635 K482 K642 5541
	CASTELLO	 K470 K656 K462 K396 K039 K395

Packaging information


Flooring Type	Collection Name	Plank Size	Thickness	Planks/ Pack.	m ² sq ft/Pack.	Weight/Pack. [kg lbs]	Pack./Pallet = m ² sq ft
Veneer Parquet	Organic VENEER PARQUET	1383 x 244 mm 54.45" x 9.61"	8.5 mm	7	2.36 25.42	16 36	45 = 106 1144
SPC Flooring	ROCKO	1210 x 192 mm 47.64" x 7.56"	5+1 mm	7	1.63 17.54	16 35	60 = 98 1250
		1210 x 192 mm 47.64" x 7.56"	5 mm	8	1.86 20.01	17 38	52 = 97 1040
		1210 x 234 mm 47.64" x 9.21"	5 mm	7	1.98 21.30	19 41	48 = 95 1024
		1210 x 295 mm 47.64" x 11.61"	5 mm	7	2.50 26.90	23 51	45 = 112 1210
O.R.C.A. Flooring	Organic FLEX	638 x 322 mm 25.12" x 12.68"	7 mm	12	2.47 26.53	16 35	32 = 79 849
		1288 x 189 mm 50.71" x 7.44"	7 mm	10	2.43 26.19	16 35	52 = 127 1362
	Organic LONG	2003 x 195 mm 78.86" x 7.68"	8 mm	7	2.73 29.42	20 44	40 = 109 1177
		Organic CLASSIC	638 x 330 mm 25.12" x 12.99"	8 mm	11	2.32 24.92	17 38
	1288 x 195 mm 50.71" x 7.68"		8 mm	9	2.26 24.32	17 36	52 = 118 1265
	Organic CLEVER SILENT	1288 x 195 mm 50.71" x 7.68"	6+1 mm	9	2.26 24.32	13 29	52 = 118 1265
mo.rel Laminate Flooring	HERRINGBONE 8	630 x 126 mm 24.80" x 4.96"	8 mm	11	0.87 9.40	6 13	96 = 84 902
	ALTITUDE	2003 x 245 mm 78.86" x 9.65"	12 mm	4	1.96 21.12	20 44	36 = 71 760
	ATLANTIC 12	1288 x 195 mm 50.71" x 7.68"	12 mm	6	1.51 16.21	15 34	52 = 78 843
	ATLANTIC 10	1288 x 195 mm 50.71" x 7.68"	10 mm	7	1.76 18.92	15 33	52 = 91 984
	ATLANTIC 8	638 x 330 mm 25.12" x 12.99"	8 mm	11	2.32 24.92	15 34	32 = 74 797
		1288 x 195 mm 50.71" x 7.68"	8 mm	9	2.26 24.32	15 34	52 = 118 1265
Classic Laminate Flooring	SUPER NATURAL	1288 x 195 mm 50.71" x 7.68"	8 mm	9	2.26 24.32	15 34	52 = 118 1265
	CASTELLO	1285 x 192 mm 50.59" x 7.56"	8 mm	9	2.22 23.89	15 34	52 = 115 1242



R129 White Poppy



Made by Kronospan



www.blauer-engel.de/uz176

* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions). Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling – on a scale from A+ (very low-emission) to C (high-emission).

www.eco-institut.de/e/portfolio/emissions-dans-lair-interieur



www.krono-original.com
www.facebook.com/KronoOriginal



www.kronospan.com
info@krono-original.com